

NOW IN STOCK



ORS CANADA™



Fall Protection




3M™ DBI-SALA® Confined Space Solutions

Get in easily. Get out safely.

Choosing a connector setup


Fall arrest/ rescue only:

Retrieval self-retracting lifeline is recommended where a ladder or other structure is present for ascending and descending the confined space.

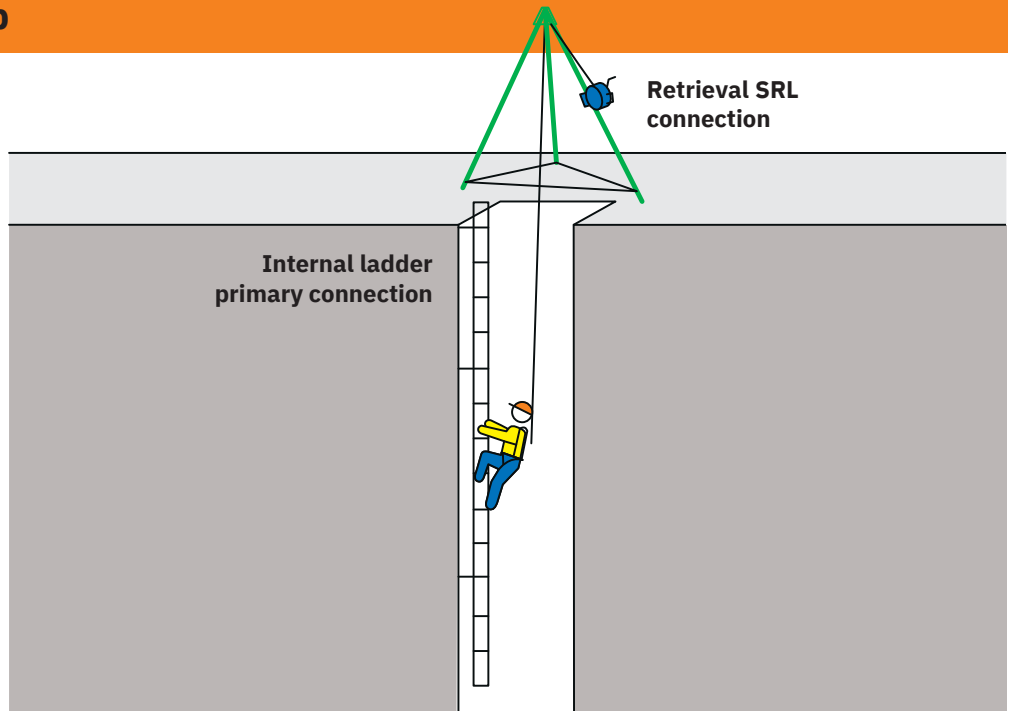


Entry/retrieval only:

Use retrieval self-retracting lanyard or man-rated winch in spaces where no fall hazard is present.

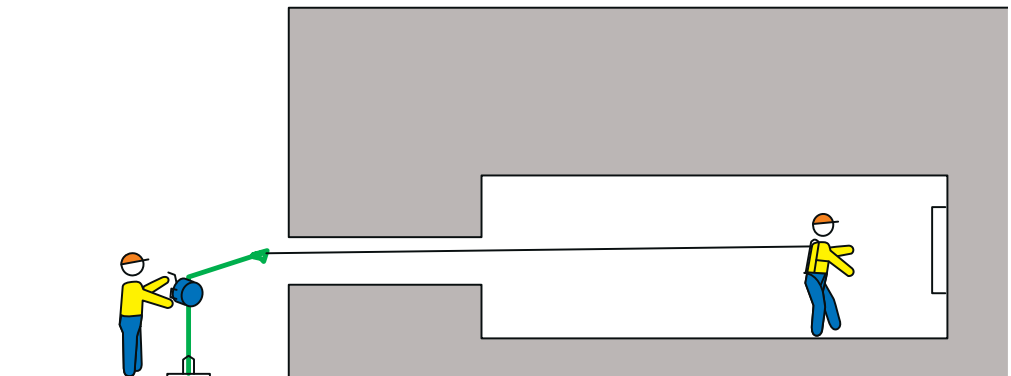


Fall arrest/ rescue and entry/ retrieval:

Use retrieval self-retracting lifeline and winch in a space with a fall hazard and where no ladder is present for ascending or descending.

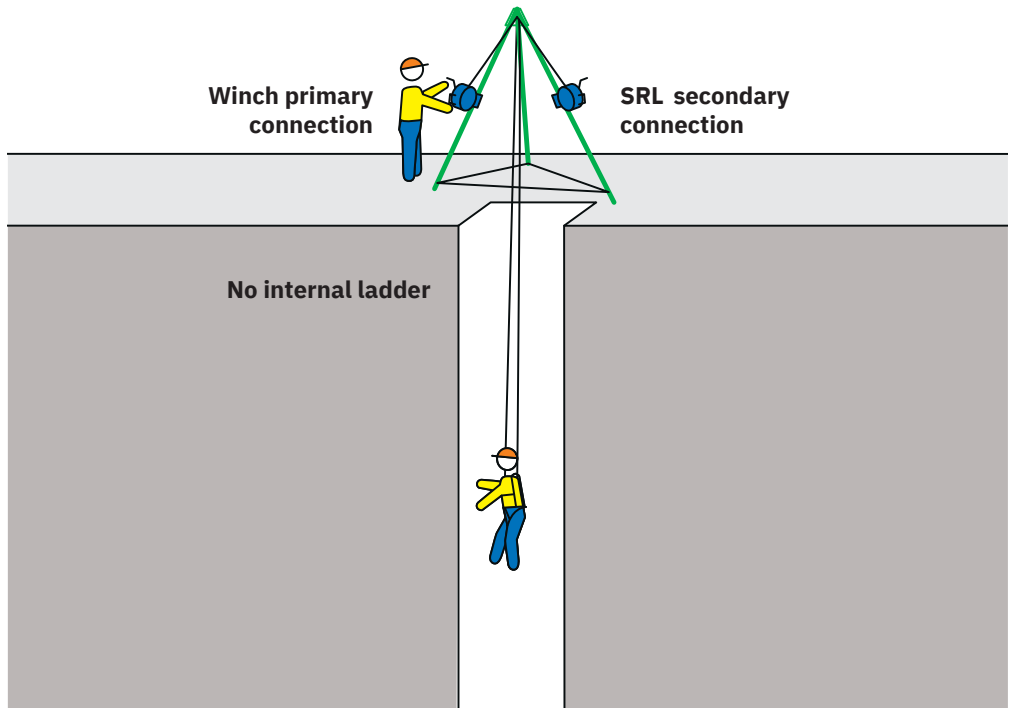

NOTE: For 3M's recommendation on the use of primary and secondary devices, please visit 3M.com/ConfinedSpace for more information.

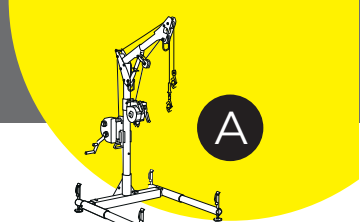

Adaptability and portability. They're both essential to successful manhole or confined space entry and retrieval. That's why we've engineered our Hoist Systems with lightweight materials like high-strength aluminum and made them adjustable and extendable to meet the specific needs of your job site. If you're not sure what you need, please call us and we'll create your customized solution to maximize ease-of-rescue—even in complex environments.


Complete Davit Systems

Turnkey davit arm systems come with all the davit components, connecting devices, and accessories needed to get the job done.

3M™ DBI-SALA® Confined Space 5-Piece Davit Hoist System 8518000



3M™ DBI-SALA® Advanced 5-Piece Davit Hoist System, 8518040

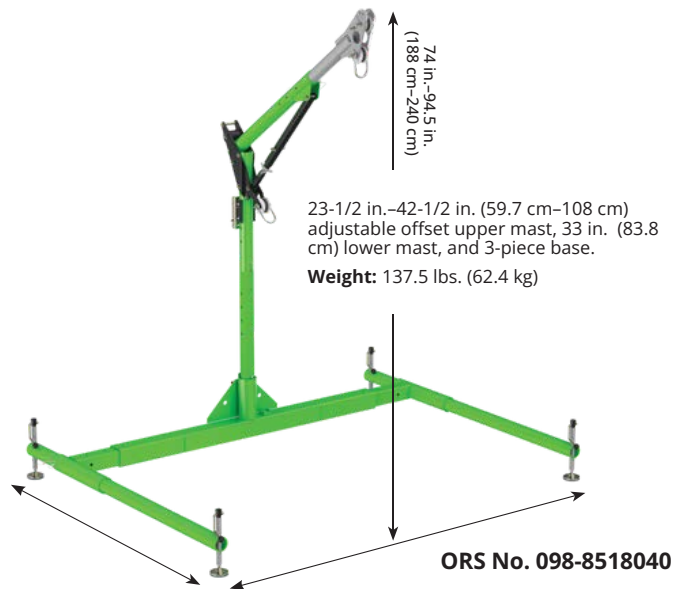

Includes winch mounting bracket. Order winch separately

Configurable Tripod Solutions



8000014 Inside of shoe = 111.8 cm–160 cm (44 in–63 in)

3M™ DBI-SALA® Aluminum Tripod, 8000014, Silver, 2.1 m (7') aluminum tripod with adjustable locking legs, safety chain, top pulley and winch bracket.

ORS No. 098-8000014

3M™ DBI-SALA® Confined Space Aluminum Tripods feature telescoping adjustable locking legs, a built-in pulley system, rubber safety shoes with spiked edges and a safety leg support chain. The integrated 5,000 lb. (22 kN) eyebolt anchor points and quick connect winch/SRL mount bracket make for straightforward connection points. 350 lb. (159.0kg) working load capacity.

CONTACT US FOR OTHER SIZES AND CONFIGURATIONS



Salalift II Winches



3M™ DBI-SALA® Salalift II Winch

3M™ DBI-SALA® Salalift™ II Winch is an essential component of confined space rescue systems and is designed for efficiently raising and lowering workers and materials into and out of confined spaces. With a 6:1 gear ratio and reserve lifeline retention system, 3M™ DBI-SALA® Salalift™ II Winch helps provide smooth entry and extraction.

ORS No. 098-8102009 3M™ DBI-SALA® Salalift II Winch, anodized yellow, black, 90 ft (27 m)

ORS No. 098-8102005 3M™ DBI-SALA® Salalift II Winch, anodized yellow, black, 120 ft (36.5 m)



- Man rated 350 lb (159 kg) capacity.
- Overload clutch.
- Gear ratio of 6:1.
- Free-wheel mode.
- Shielded ball bearings.
- Lengths from 60' - 120' (18 m - 36.5 m) available.
- Cable and rope lifelines with swiveling snap hook and impact indicator.
- Carrying handle for easy transport.
- Corrosion-resistant construction.
- Quick-mount bracket and carrying bag.

Digital Winches

3M™ DBI-SALA® Salalift Advanced Digital Winch 100 & 200 Series



The 3M™ DBI-SALA® Confined Space Winch maximizes efficiency and safety for challenging fall protection and confined space situations. The triple-redundant braking system includes three independent working pawls and a backup brake for added security. Used for various applications, this winch is the primary means of support for hoist system.

098-8518568 Advanced Digital 100 Series Winch, power drive silver, black, 90 ft (27 m)

098-8518588 Advanced Digital 200 Series Winch, power drive, silver, black, 140 ft (42 m)

- 9:1 and 4:1 gear ratio mechanical advantage
- Incorporated mounting bracket allows for attachment to 3M DBI SALA tripods and davits
- Built-in digital usage indicator
- Triple redundant braking system and brake wear indicator
- Bearings sealed at all contact points
- Swiveling snap hook includes impact indicator
- Drill-enabled Power drive option allows for more efficient retrieval available with select models
- Recommended for use in many industries
- Power Drive Option Available on select skus
- Power drive units require Overload Protection Clutch (8512936) — Not Included. Overload Protection Clutch used in conjunction with a drill for retrieving an entrant.

CONTACT US FOR OTHER SIZES AND CONFIGURATIONS



Sealed Self-Retracting Lifelines

3M™ DBI-SALA® Sealed-Blok™ Self Retracting Lifeline



The 3M™ DBI-SALA® Sealed-Blok™ Self-Retracting Lifeline (SRL) incorporates a patented concept that helps separate components, such as the motor spring and brake, from foreign elements such as grease, moisture, and dirt. The 3M™ DBI-SALA® Sealed-Blok™ Self-Retracting Lifeline is IP-69K rated to provide protection against ingress of dust, high temperatures, and high pressure water, for use in extreme environmental conditions. These lifelines are available in Overhead, Retrieval, and RSQ / Rescue SRL configurations.

- Available in multiple configurations, lifeline lengths, and material types
- Critical SRL components sealed from environmental exposure
- Swiveling self-locking snap hook with impact indicator
- Pivoting anchorage connector loop
- Durable Construction
- Galvanized & stainless steel cable options
- Quick activating speed-sensing locking system
- Equipped with an integrated carrying handle to assist in transporting the SRL to job sites
- IP 69K ingress protection rating
- Integrated fall arrest energy dissipation system
- Emergency retrieval system available on some models
- RFID tag is embedded in polyurethane bumper

ORS No. 098-3400876
ORS No. 098-3400883

Sealed-Blok™ SRL, retrieval/backer, 85 ft (25.5 m) galvanized steel cable
Sealed-Blok™ SRL, retrieval/backer, 85 ft (25.5 m) stainless steel cable

NEW LENGTHS AVAILABLE

ORS No. 098-3400981
ORS No. 098-3400988

Sealed-Blok™ SRL, retrieval/bracket, 130 ft (39 m) galvanized steel cable
Sealed-Blok™ SRL, retrieval/bracket, 130 ft (39 m) stainless steel cable

Accessories



3M™ DBI-SALA® Advanced Overload Clutch

The 3M™ DBI-SALA® Advanced Overload Clutch is required for use with power drive style Advanced Digital Winches (450 lbs (204 kg) maximum working load).

- Overload protection clutch
- For 3M™ DBI-SALA® Advanced Power Drive Winches (Digital Series)
- Maximum working load of 450 lbs (204 kg)
- Durable aluminum and steel construction
- Compact and lightweight design

ORS No. 098-8512936

3M™ DBI-SALA® Advanced Overload Clutch, for Advanced Power Drive Winches (Digital Series)

CONTACT US FOR THE FULL LINE OF ACCESSORIES



Harnesses

3M™ Protecta® Vest-Style Retrieval Harness



- Parachute torso adjusters
- Polyester web
- Available in a variety of configurations
- Back and Shoulder D-rings, Tongue-Buckle Leg Connection, Pass-Through Chest Connection
- 3M™ Protecta® P50 Safety Harnesses (previously known as 'Protecta® First®') are 3M's entry level safety compliance harnesses

ORS No. 098-1161549C	3M™ Protecta® Vest-Style Harness, retrieval, small
ORS No. 098-1161550C	3M™ Protecta® Vest-Style Harness, retrieval, medium/large
ORS No. 098-1161551C	3M™ Protecta® Vest-Style Harness, retrieval, extra large

CONTACT US FOR OTHER SIZES AND CONFIGURATIONS

3M™ DBI-SALA® Delta™ Vest-Style Retrieval Harness, Universal

- Automatic stand-up back D-ring enables efficient dorsal connections
- Revolving torso adjuster buckles available on select models
- Available in multiple styles, configurations, and leg and chest connection options
- Integrated suspension trauma straps included on most models
- Equipped with auto-resetting lanyard keepers for fast and easy parking of snap hooks and carabiners
- Protected labels, equipped with 3M™ Connected Safety ID (CSID)
- Revolver™ vertical torso adjusters
- Impact Indicator
- Heavy duty zipper
- Internal mesh lining
- Built-in pockets
- Protected labels, equipped with 3M™ Connected Safety ID (CSID)



ORS No. 098-1101254C	3M™ DBI-SALA® Delta™ Vest-Style Retrieval Harness, Universal, Tongue Buckles
ORS No. 098-1110602C	3M™ DBI-SALA® Delta™ Vest-Style Retrieval Harness, Universal, Quick Connect Buckles
ORS No. 098-1101781C	3M™ DBI-SALA® Delta™ Vest-Style Retrieval Harness, Universal, Pass-Through Buckles (pictured)

CONTACT US FOR OTHER SIZES AND CONFIGURATIONS


Winches

Used for | Raising and lowering personnel and equipment



Retrieval SRL's

Used for | Fall arrest
Emergency rescue

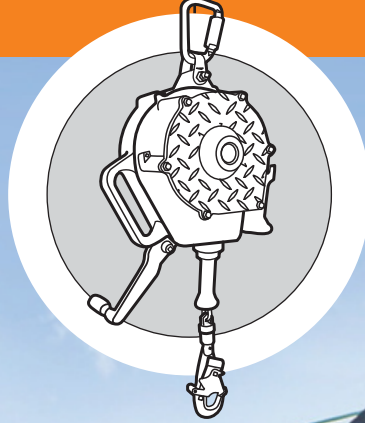

SRL's

Used for | Fall arrest only



Additional Confined Space Entry PPE Solutions

Personal Protective Equipment

Explore more at ORSCanada.com



Reusable Respirator



Disposable Respirator



Powered Air Purifying Respirator



Welding Protection



Protective Eyewear



Protective Communication



Hearing Protection



Head Protection

CONTACT US FOR ALL OF YOUR CONFINED SPACE AND PERSONAL PROTECTIVE EQUIPMENT NEEDS

TOLL FREE: 1-800-745-2449

LOCAL : 905-670-1223 OR 403-243-8551



ORS CANADA™

PROUDLY CANADA'S ONLY 100% PURE WHOLESALE PARTNER
CONSTRUCTION • ENERGY • INDUSTRIAL • JANITORIAL • SAFETY • WELDING

LE SEUL PARTENAIRE CANADIEN GROSSISTE 100% DÉDIÉ AU DISTRIBUTEURS
SÉCURITÉ • SOUDAGE • SANITATION • INDUSTRIEL • CONSTRUCTION • ÉNERGIE

3M

Authorized Wholesaler
Grossiste autorisé