



**JOBSITE SERIES  
TELESCOPING  
MULTI-  
POSITION  
LADDER**

- Extension ladder
- Step ladder
- Stairway ladder
- 90° wall ladder

**METALTECH**®

**BUILT TOUGH FOR  
SAFETY**

# TELESCOPING MULTI- POSITION LADDER

**5 IN 1** LOAD CAPACITY **300 LB** 136 KG


ANSI TYPE  
**IA**

CSA  
**US**  
ANSI A14.2



	13' TELESCOPING MULTI-POSITION	17' TELESCOPING MULTI-POSITION	21' TELESCOPING MULTI-POSITION	25' TELESCOPING MULTI-POSITION
<b>CLOSED DIMENSIONS (WXDXH)</b>	22.25 X 7.75 X 42.75 IN. (56.5 X 19.7 X 108.6 CM)	23.5 X 8 X 54.5 IN. (59.7 X 20.3 X 138.4 CM)	26.75 X 8.75 X 66.5 IN. (67.9 X 22.2 X 168.9 CM)	29.5 X 8 X 78.5 IN. (74.9 X 20.3 X 199.4 CM)
<b>LADDER HEIGHT</b>	13 FT (4 M)	17 FT (5.2 M)	21 FT (6.4 M)	25 FT (7.6 M)
<b>MAXIMUM REACH*</b>	14 FT 4 IN. (4.4 M)	18 FT 1 IN. (5.5 M)	22 FT (6.7 M)	26 FT (7.9 M)
<b>WEIGHT</b>	27.6 LB (12.5 KG)	34.5 LB (15.6 KG)	42.3 LB (19.2 KG)	53.1 LB (24.1 KG)
<b>NUMBER OF POSITIONS</b>	19	28	38	49
<b>LOAD CAPACITY</b>	300 LB (136 KG)	300 LB (136 KG)	300 LB (136 KG)	300 LB (136 KG)
<b>MATERIAL</b>	ALUMINUM	ALUMINUM	ALUMINUM	ALUMINUM
<b>STANDARD</b>	ANSI TYPE IA, CSA GRADE 1A AND OSHA	ANSI TYPE IA, CSA GRADE 1A AND OSHA	ANSI TYPE IA, CSA GRADE 1A AND OSHA	ANSI TYPE IA, OSHA AND CSA US
<b>MODEL</b>	E-MTL7000AL	E-MTL7100AL	E-MTL7200AL	E-MTL7300AL
<b>UPC</b>	778300001590	778300001606	778300001613	778300000937
<b>HIGHEST STANDING LEVEL</b>				
<b>STEPLADDER</b>	2 FT 11 IN. (0.89 M)	4 FT 9 IN. (1.4 M)	6 FT 9 IN. (2.1 M)	8 FT 7 IN. (2.6 M)
<b>EXTENSION LADDER</b>	7 FT 9 IN. (2.4 M)	11 FT 7 IN. (3.5 M)	15 FT 5 IN. (3.5 M)	20 FT (6.1 M)
<b>SCAFFOLD SUPPORTS</b>	1 FT 11 IN. (0.58 M)	2 FT 11 IN. (0.89 M)	3 FT 10 IN. (1.2 M)	4 FT 9 IN. (1.4 M)

\*Calculated with a 5'9" (1.75 m) person with a vertical 12" (30 cm) reach.

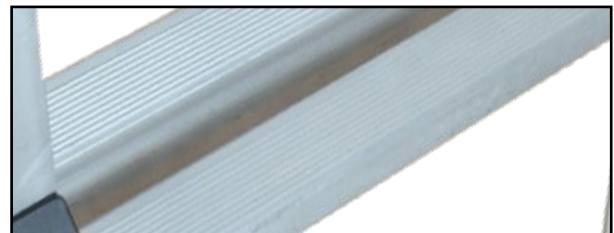

**METALTECH**

**WWW.METALTECH.CO**

**1 800 363-7587**